



# Motorola Slvr L7 Front Panel Replacement

Step-by-Step process of installing HTC Front Panel

Written By: Jorge Trujillo






## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Front Panel

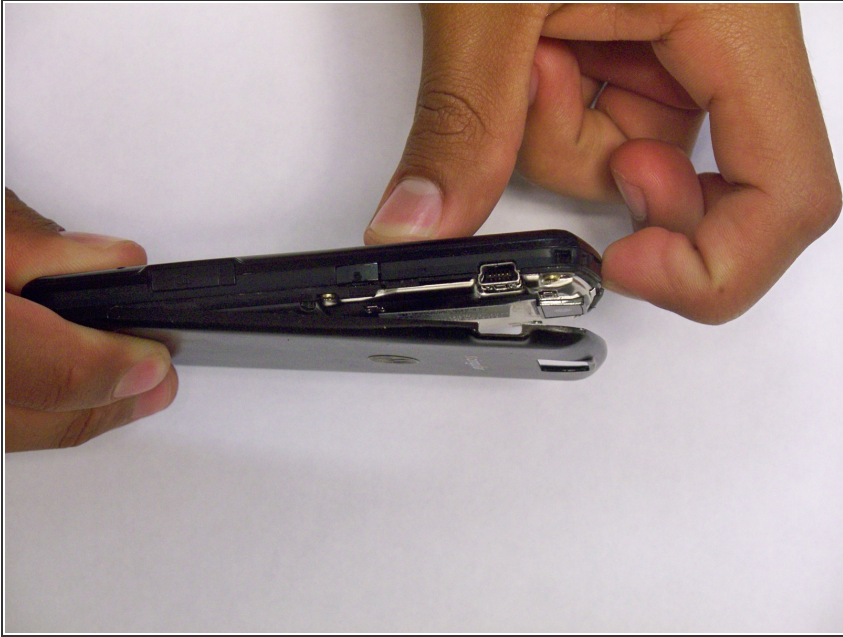

- Push down on the black tab located at the top center of the Motorola phone


## Step 2



- Remove the battery by pulling the battery from the top center.




## Step 3

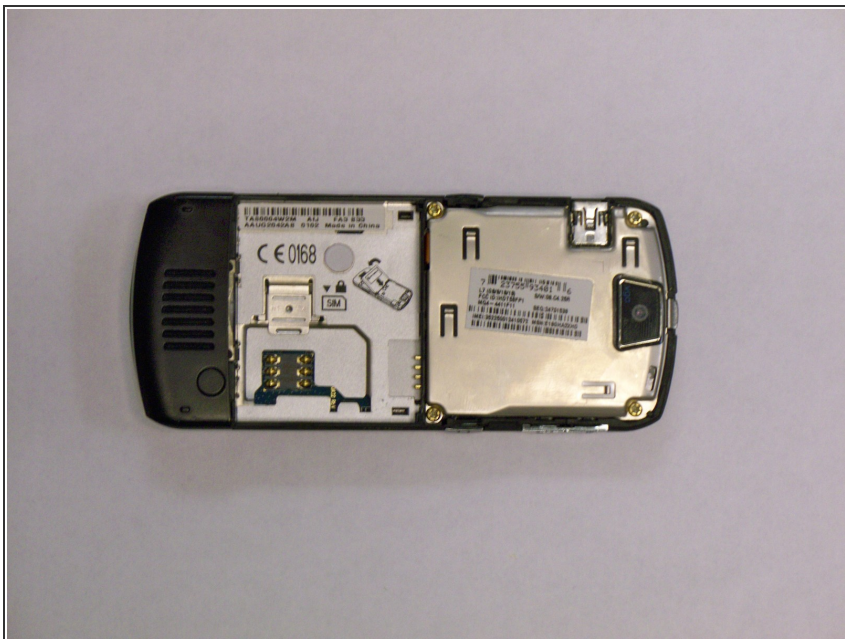



- Remove the four T6 2 mm TX Torx screws

## Step 4

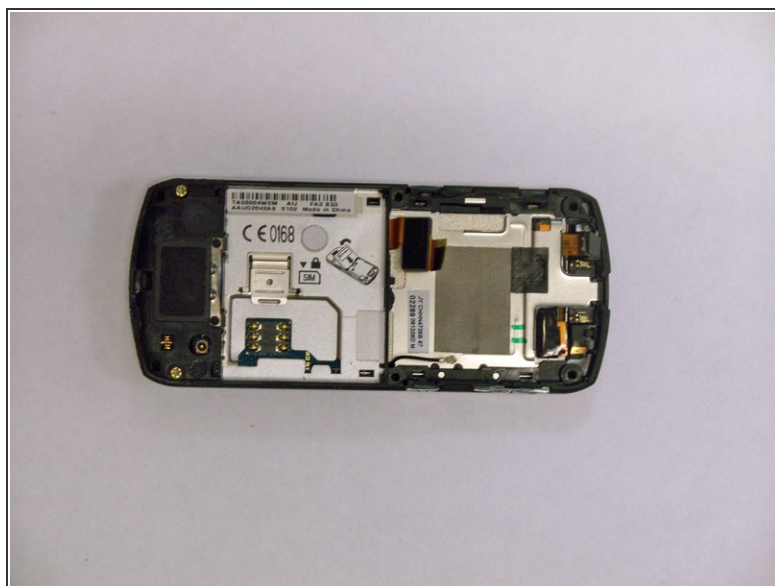


- Insert the flat end of a plastic opening tool and pry the metal cover up off the phone.

## Step 5

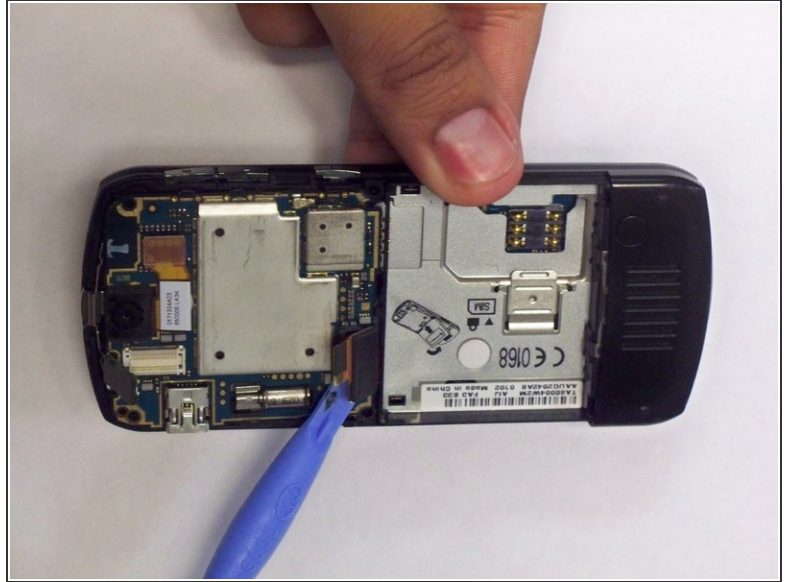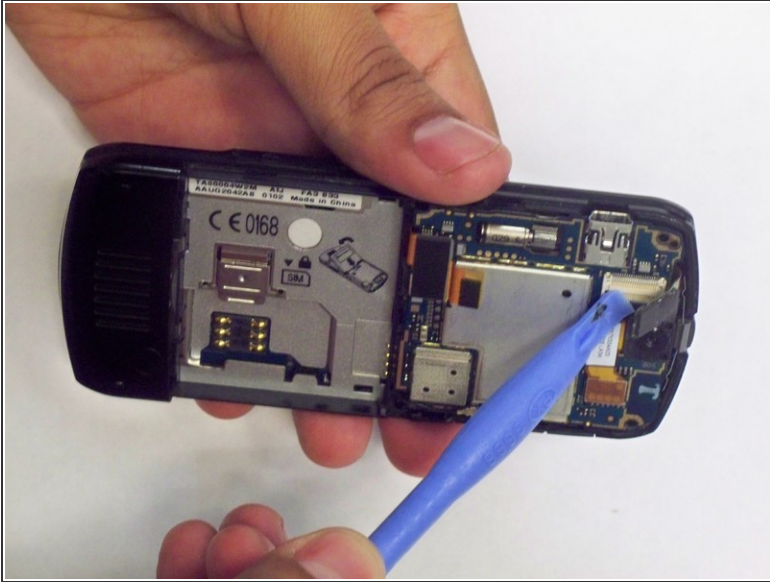

- Carefully, disconnect the two connectors from their sockets on the motherboard using the flat end of a plastic opening tool.


## Step 6

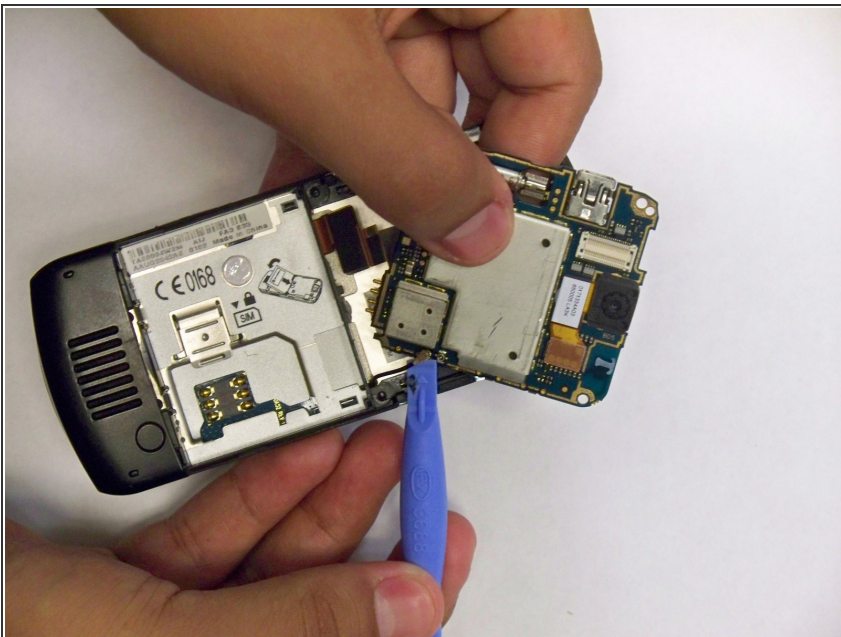

- Use a plastic opening tool to pry the antenna cable connectors from its respective socket on the motherboard.
- De-route the antenna cable by pulling it out.



## Step 7

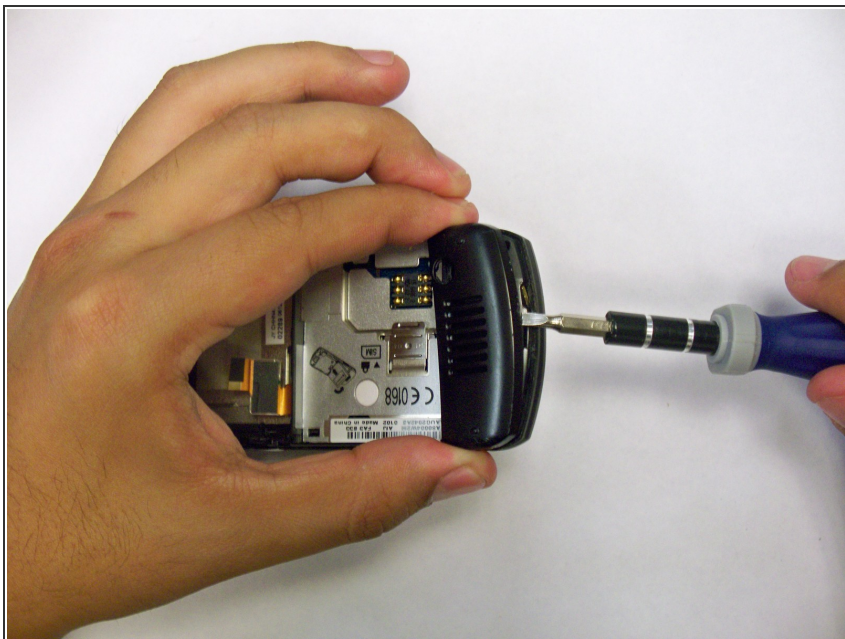

- Use a spudger to lift and remove the black plastic screw cover at the bottom of the phone near the speaker
- The cover is attached by adhesive, so some force may be required.

## Step 8



- Insert the flat end of a spudger and pry the frame off the phone.
- The frame is attached by adhesive, so some force may be required

To reassemble your device, follow these instructions in reverse order.

